

VLM Series Leveling Mounts

Features/Benefits

- Load Range from 50 – 12,000 lbs.
- Effective Shock and Vibration control
- Available in 4 sizes
- Built-in leveling
- Anchor bolts not required
- Quickly and easily installed
- Natural Frequency approx. 10 Hz at rated load


Construction/Material Data

- Structural sections – painted steel housing with electro-plated hardware.
- Neoprene elastomer
 - Resists oil, ozone and most solvents

Applications

- Grinders, Jig Bores, Lathes
- Milling Machines
- Punch Presses, Shears, Brakes
- Processing Equipment
- Printing Presses
- Diesel Generators

Typical Installation

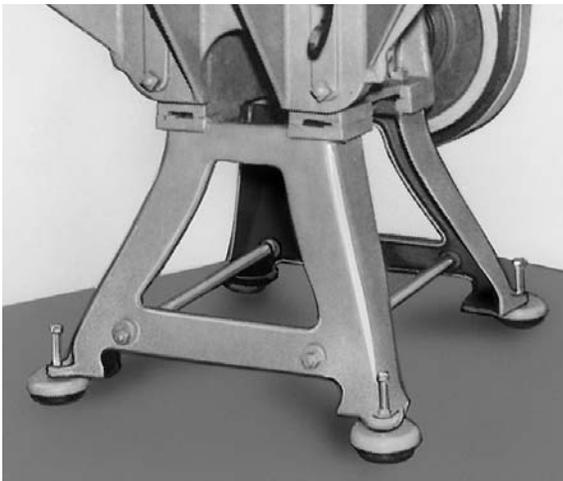

DFA Sales


www.Korfund.com

info@Korfund.com

VLM3/5/6/8


VLM Series Installation Data

Part Number	Axial Static Load Max. (Pounds)
VLM-3	1000
VLM-5	1500
VLM-6	4000
VLM-8	12000

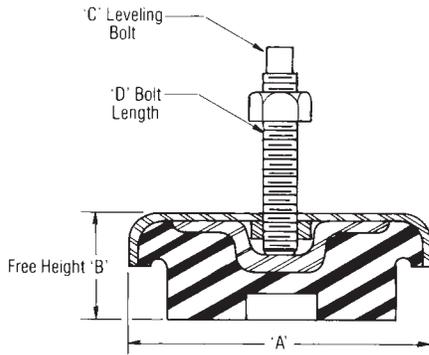


Dimensions	A	B	C	D
VLM-3	3½"	1½"	½"-13	3½"
VLM-5	5"	1¾"	½"-13	5"
VLM-6	6¼"	1¾"	¾"-10	5"
VLM-8	8"	2"	1"-14	8"

Installation Configuration

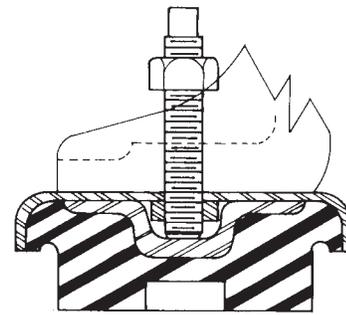

MOUNT BEFORE LEVELING

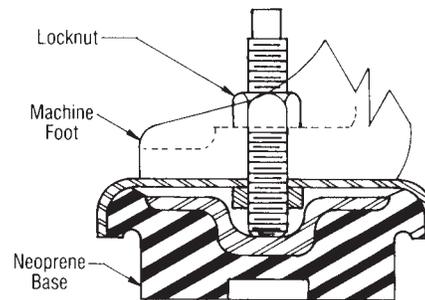

MOUNT AFTER LEVELING

INSTALLATION INSTRUCTIONS

1. Select proper mount for load required.
2. Remove leveling bolt from mount.
3. Center mount under hole in equipment leg or base.
4. Replace leveling bolt and turn clockwise to level equipment as required.
5. Tighten lock-nut securely.

